



## Extreme Safety

Suction band-type brakes, independently certified safety controllers, more than 21 TÜV functional safety features, and ultrasensitive collision detection by torque sensors, comprehensively ensure a safer human-machine collaboration.

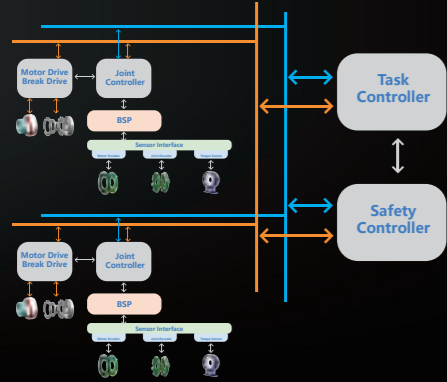

## Superior Performance

Cutting-edge motion control technologies for industrial robots to deliver first-class path accuracy, combined with customized motor drive control systems, create a powerful performance.

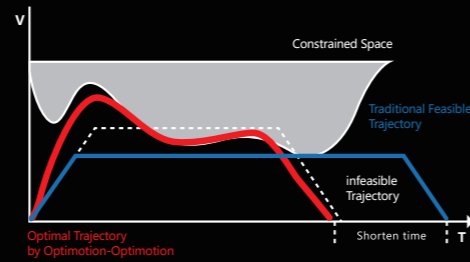

**JM-TRONIK**

**ROKAE**


# CR Series

## Flexible Collaborative Robots

A Powerful Yet Flexible All-Rounder

## Compliant Flexibility

By adopting force-position hybrid control technology, highly dynamic force control is integrated into robot joints, which provides compliance control close to human hands, while the force control process kit helps greatly enhance force control task efficiency with no additional extensions required.

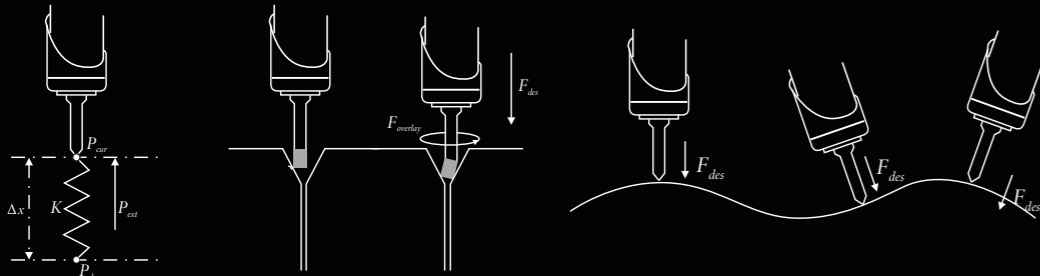

## Ease of Use

Fast installation and flexible deployment, direct teaching control, and graphical programming enable greater ease of use. Applicable to a variety of application scenarios by supporting most extensions in the industrial ecosystem.



## Excellent Reliability

IP67 protection, 100+ design verification experiments, and 20+ factory tests, build them into an ideal choice for industrial applications.



**JM-TRONIK**

A: ul. Wapienna 43/45, 04-691 Warszawa

E: sprzedaz@jm-tronik.eu

T: +48 22 299 74 46

W: www.jm-tronik.eu

Wszelkie prawa zastrzeżone. Specyfikacja i dane techniczne produktu mogą ulec zmianie w wyniku ciągłego doskonalenia.

2025-02-10



A Powerful Yet Flexible All-Rounder

xmate

# CR Series

## Flexible Collaborative Robots

xMate CR series flexible collaborative robots are built on the force-position hybrid control framework and xCore, a new self-developed high-performance control system for industrial robots. Designed for industrial applications, the robots deliver improved motion performance, force control, safety, ease of use, and reliability. Robot body with IP67 protection rating can adapt to more stringent application scenarios. The independent control cabinet provides richer IO resources and more flexible extensibility. Its built-in independent safety controller, TÜV certified, functional safety meets ISO13849-1:2015 standard, up to PL d/Cat.3 level.

The newly upgraded xMate CR series of flexible cobots further broadens the application scenarios with the characteristics of safer, more flexible and easier to use. The payload capacity has increased to 45kg, with an operating range of up to 2,246 mm. This significantly expands the application scenarios for collaborative robots, allowing them to cover a wide range of industry-specific applications. It comprehensively assists enterprises in enhancing production efficiency and rapidly achieving flexible manufacturing.

## Applications

xMate CR series flexible collaborative robots can undertake a variety of tasks, including

- Compliant assembly
- Screw locking
- Deburring and grinding
- Handling
- Loading and unloading
- Material removal
- Packaging and palletizing
- Welding
- Heavy workpiece handling and palletizing
- New energy assembly
- Flexible machining of large-size parts

Driving improved productivity and flexible automation for companies of all sizes.



Model CR20-17/2.0-5  
Payload 17 kg  
Reach 2,047 mm

Model CR20-25/1.8-5  
Payload 25 kg  
Reach 1,798 mm

Model CR20-20/1.8  
Payload 20 kg  
Reach 1,798 mm

Model CR18-18/1.0  
Payload 18 kg  
Reach 1,062 mm

Model CR7-7/0.98  
Payload 7 kg  
Reach 988 mm

Model CR12-12/1.4  
Payload 12 kg  
Reach 1,434 mm

Model CR12-20/1.4  
Payload 20 kg  
Reach 1,434 mm

Model CR35-45/1.9  
Payload 45 kg  
Reach 1,947 mm

Model CR35-35/2.2  
Payload 35 kg  
Reach 2,246 mm

**CR7-7/0.98**

**CR12-12/1.4**

**CR12-20/1.4**

**CR18-18/1.0**

**CR20-20/1.8**

**CR20-25/1.8-5**

**CR20-17/2.0-5**

**CR35-35/2.2**

**CR35-45/1.9**

**Specifications**

Payload	7 kg	12 kg	20 kg	18 kg	20 kg	25 kg	17 kg	35 kg	45 kg
Reach	988 mm	1,434 mm	1,434 mm	1,062 mm	1,798 mm	1,798 mm	2,047 mm	2,246 mm	1,947 mm
Weight	About 25 kg	About 41 kg	About 41 kg	About 38 kg	About 71 kg	About 69 kg	About 71 kg	About 165 kg	About 161 kg
Degrees of freedom	6	6	6	6	6	5	5	6	6
MTBF	> 80,000 h*	> 80,000 h*	> 80,000 h*	> 80,000 h*	> 80,000 h*	> 80,000 h*	> 80,000 h*	—	—
Power supply	48VDC	48VDC	48VDC	48VDC	48VDC	48VDC	48VDC	—	—
Programming	Direct teaching control and graphical interface	Direct teaching control and graphical interface	Direct teaching control and graphical interface	Direct teaching control and graphical interface	Direct teaching control and graphical interface	Direct teaching control and graphical interface	Direct teaching control and graphical interface	Graphical interface	Graphical interface

**Performance**

Typical Power	300 w	500 w	500 w	600 w	1,000 w	900 w	600 w	—	—							
Safety	Over 21 adjustable safety features including collision detection, virtual walls, and collaboration mode (Optional for models 35kg and above)															
Certification	EN ISO 13849-1, EN ISO 10218-1/ PL d, Cat. 3; ISO 15066, and EU CE marking requirements, KCs marking requirements, EAC marking requirements															
Force sensing (tool flange)	Force, x-y-z	Torque, x-y-z	Force, x-y-z	Torque, x-y-z	Force, x-y-z	Torque, x-y-z	Force, x-y-z	Torque, x-y-z	Force, x-y-z	Torque, x-y-z	Force, x-y-z	Torque, x-y-z	Force, x-y-z	Torque, x-y-z	—	—
Torque sensor resolution	0.1N	0.02Nm	0.1N	0.02Nm	0.1N	0.02Nm	0.1N	0.02Nm	0.1N	0.02Nm	0.1N	0.02Nm	0.1N	0.02Nm	—	—
Adjustable range of Cartesian stiffness	0~6000N/m, 0~1000Nm/rad		0~18000N/m, 0~2500Nm/rad		0~18000N/m, 0~2500Nm/rad		0~18000N/m, 0~2500Nm/rad		0~18000N/m, 0~2500Nm/rad		0~18000N/m, 0~2500Nm/rad		0~18000N/m, 0~2500Nm/rad		—	—

**Motion**

Repeatability	±0.02 mm		±0.03 mm		±0.05 mm		±0.03 mm		±0.05 mm		±0.05 mm		±0.05 mm		±0.05 mm		±0.05 mm	
Motion joint	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed
Axis 1	±360°	180°/s	±360°	120°/s	±360°	90°/s	±360°	120°/s	±360°	120°/s	±360°	120°/s	±360°	120°/s	±360°	163°/s	±360°	163°/s
Axis 2	±360°	180°/s	±360°	120°/s	±360°	90°/s	±360°	120°/s	±360°	120°/s	±360°	120°/s	±360°	120°/s	±360°	163°/s	±170°	163°/s
Axis 3	±360°	234°/s	±360°	180°/s	±360°	112°/s	±165°	180°/s	±170°	120°/s	±170°	120°/s	±165°	120°/s	±168°	135°/s	±168°	135°/s
Axis 4	±360°	240°/s	±360°	234°/s	±360°	146°/s	±360°	180°/s	±360°	180°/s	±360°	234°/s	±360°	234°/s	±360°	155°/s	±360°	155°/s
Axis 5	±360°	240°/s	±360°	240°/s	±360°	200°/s	±360°	180°/s	±360°	234°/s	±360°	234°/s	±360°	234°/s	±360°	199°/s	±360°	199°/s
Axis 6	±360°	240°/s	±360°	240°/s	±360°	200°/s	±360°	180°/s	±360°	234°/s	—	—	—	—	±360°	228°/s	±360°	228°/s
Maximum speed at tool end	≤3.2m/s		≤3.0m/s		≤3.0m/s		≤3.0m/s		≤3.5m/s		≤3.5m/s		≤4.0m/s		≤6.0m/s		≤6.0m/s	

**Physical properties**

IP rating	IP67	IP67
ISO cleanroom class	5	5
Noise	≤ 70 dB(A)	≤ 85 dB(A)
Operating ambient temperature	0°C~50°C	0°C~40°C
Humidity	≤ 93% RH (non-condensing)	≤ 93% RH (non-condensing)
Robot installation	At any angle	At any angle
Tool I/O ports	2 Digital outputs, 2 Digital inputs, 2 Analog inputs	2 Digital outputs, 2 Digital inputs, 2 Analog inputs
Tool communication interface	RS485(Alternative with two analog input pins, can not be used simultaneously)	RS485(Alternative with two analog input pins, can not be used simultaneously)
Tool I/O power supply	12V/24V 1A (rated)	12V/24V 1A (rated)

Considering the upgrade of the product, the actual parameters of the product shall be subject to the corresponding hardware installation manual  
 \*Note: If you have any questions about the status of product certification, please contact the manufacturer. Please refer to the corresponding product manual for more details

**Controller**

Name	xMate Control Cab (MCC)	xMate Control Cab Mix(MCCM)
Applicable models	CR Series models below 35kg	CR Series models 35kg and above
IP rating	IP54	IP54
Operating ambient temperature	0°C~50°C	0°C~50°C
Humidity	≤93% RH (Non-condensing)	≤93% RH (Non-condensing)
Input power	Single-phase 90V ~ 264VAC, 47~63Hz, Single-phase 180V ~ 264VAC, 47~63Hz (CR20 Series)	110V~260V AC, 50~60Hz
Dimensions	450 mm x 250 mm x 350 mm	480 mm×325 mm×360 mm
Weight*	About 15 kg	About 15 kg
User IO	16 inputs and 16 outputs (standard)	16 inputs and 16 outputs (standard)
Communication	5 safety inputs, 4 safety outputs (all dual-redundant channels)	5 safety inputs, 4 safety outputs (all dual-redundant channels)
Power output	RS232*1; Gigabit Ethernet RJ45*1;USB3.0*2; HDMI*1; EtherCAT*1	RS232*1; Gigabit Ethernet RJ45*1;USB3.0*2; HDMI*1; EtherCAT*1
Optional extension	General Digital I/O module; Analog I/O module; Incremental encoder signal acquisition module, etc.	General Digital I/O module; Analog I/O module; Incremental encoder signal acquisition module, etc.

**Teach Pendant**

Name	xPad2
Dimensions	290 mm×170 mm×80 mm
Weight	About 840g ( excluding cable )
Cable length	5 m/7 m/15 m/22 m
Display	10.1-in LCD with a resolution of 1,920×1,200
IP rating	IP54

\*Note: There will be some differences in the weight of the control cabinet in different configurations.

